

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/031501 A1**

- (51) International Patent Classification<sup>7</sup>: **E04B 1/82, 2/02** (72) Inventor; and  
(75) Inventor/Applicant (for US only): **DOWNEY, Paul,**  
C. [CA/CA]; 33 Craighurst Avenue, Toronto, Ontario  
MYR-1J9 (CA).
- (21) International Application Number:  
PCT/US2003/031348
- (22) International Filing Date: 1 October 2003 (01.10.2003) (74) Agent: **ANASTASI, Salvatore;** Barley Snyder, Suite 275,  
5 Westlakes Drive, Berwyn, PA 19312 (US).
- (25) Filing Language: English (81) Designated States (national): CA, US.
- (26) Publication Language: English **Published:**  
— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments
- (30) Priority Data:  
60/415,054 1 October 2002 (01.10.2002) US
- (71) Applicant (for all designated States except US): **DODGE-  
REGUPOL, INCORPORATED** [US/US]; 715 Fountain  
Avenue, Lancaster, PA 17601 (US). For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: NOISE AND VIBRATION MITIGATING MAT

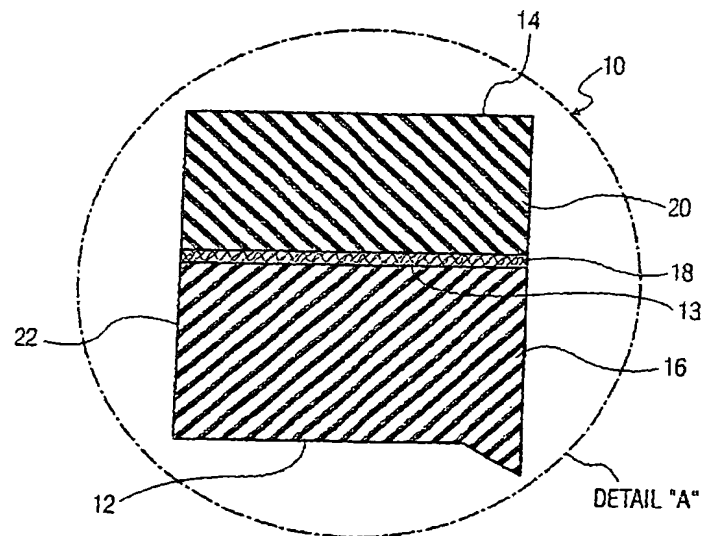

(57) Abstract: A multi-layer noise mitigating mat (10) is provided by the present invention. A first layer (16) is formed of bound rubber and features a profiled surface forming a bottom surface (12) of the mat (10) and a flat surface (13) opposite the profiled surface. A second layer (18) consists of a fabric or reinforcing agent which is affixed to the first layer (16) along its flat surface (13). A third layer (20) formed of bound rubber is affixed to the second layer (18) forming the top surface (14) of the mat.

## Noise and Vibration Mitigating Mat

### Field of the Invention

5       The present invention is related to a sound absorbing material, and more particularly to a sound absorbing mat for mitigating impact generated and structure borne noise.

### Background of the Invention

10       In many situations, noise is generated on horizontal surfaces such as floors or road surfaces due to various impacts. For example, a truck passing over a road generates impact noise. Such impact noise typically travels through the road and then to adjacent structures. Likewise, machinery which generates vibrations during use may generate impact or vibrational noise which passes through the floor and into adjacent structures. In yet another example,  
15       locomotives and railcars passing over a track generate impact and vibrational noise which passes into the ground and potentially into adjacent structures such as homes, roads or bridges. Mitigating this noise is especially problematic due to the relatively large axle loads of the locomotives and railcars on the tracks.

20       Such impact noise and vibrations generated under these and similar conditions have been found to be undesirable due to the noise and vibration pollution created in adjacent and surrounding structures. It is therefore desirable to mitigate the affects of impact and vibrations on surrounding structures.

### Summary of the Invention

25       A multi-layer noise mitigating mat is provided by the present invention. A first layer is formed of bound rubber and features a profiled surface forming a bottom surface of the mat and

a flat surface opposite the profiled surface. A second layer consists of a fabric or reinforcing agent which is affixed to the first layer along its flat surface. A third layer formed of bound rubber is affixed to the second layer forming the top surface of the mat.

## 5 Brief Description of the Drawings

The invention will now be described by way of example with reference to the accompanying figures of which:

Figure 1A is a partial side view of the noise mitigating mat according to the present invention.

10 Figure 1B is a detailed cross sectional view of the noise mitigating mat according to the present invention.

Figure 2 is a cross sectional view of the noise mitigating mat of Figure 1 installed in a railway bed application.

## 15 Detailed Description of the Preferred Embodiments

Referring to Figures 1A, 1B and 2, the mat 10 has a bottom surface 12 and a top surface 14, which extend between a pair of sides 22. The mat 10 can be produced in a continuous role such that the surfaces 12, 14 extend for a distance between the sides 22. The top surface 14 and the oppositely facing bottom surface 12 are essentially parallel to each other and spaced apart by an overall thickness  $t$ . The bottom surface 12 is contoured such that the overall thickness is measured at the maximum dimension of the contour while the thickness over the bottom surface 12 varies between a minimum thickness  $t_1$  and the overall thickness  $t$ . As the mat is manufactured in continuous sheets, the length of the mat 10 will be governed by the particular

20

installation. This provides maximum flexibility during installation. The use of a continuous sheet provides advantages which will be more fully described below.

An installation of the mat 10 according to the present invention is shown in Figure 2 wherein the mat 10 is placed in a railway bed. The railway bed consists of a packed earth, asphalt or concrete base 30 which is topped with the noise and vibrating mitigating mat 10, ballast 40, railway ties 50, and rails 60. During the installation of the railway bed, a continuous roll of the mat 10 is staged to be unrolled in a continuous manner over the packed earth base 30. This may be accomplished through the use of spooling machinery. Since the rubber material of the present invention has not been vulcanized, the rubber material has the flexibility required to allow it to be delivered in rolls. With the mat 10 properly positioned on the packed earth base 30, the ballast 40, ties 50 and rails 60 may then be applied in a conventional manner.

The mat 10 consists of three layers between the bottom surface 12 and top surface 14. The first layer 16 is formed of recycled bound rubber products and is contoured on the bottom surface 12 and flat along its top surface 13. The second or intermediate layer 18 is formed of fabric or reinforcing agent such as EE200-80 polyester polynylon blend which is commercially available from several sources such as Allied Signal and is a relatively flat material having a thickness extending between the first layer 16 and the third layer 20. The third layer 20 is also formed of recycled rubber products and extends between the top surface 14 and the intermediate layer 18.

The first and third layers 16, 20 are manufactured from recycled rubber. During the manufacturing process Styrenebutadiene Rubber (SBR) and natural rubber are mixed with a polyurethane and cured under moderate temperature to form a large cylindrical member of rubber. Although each layer 16, 20 has a large percentage of SBR rubber therein, the mat 10 can

be made of SBR rubber, other rubbers or a combination thereof. In order to provide a continuous sheet of material for each layer 16, 20, it is cut from the large cylindrical member. As the cylindrical member is rotated, blades engage an outside layer of the cylindrical member and cause the outside layer to be cut away from the cylindrical member thereby forming the  
5    respective continuous sheet. This process of manufacturing each layer 16, 20 in the form of a continuous sheet is significantly different than known vulcanizing methods generally used to manufacture materials of this type. In manufacturing the mat 10, first and third layers 16, 20 are each manufactured having a desired number of voids which are randomly positioned within each layer. The material for the first layer 16 has a relatively low density as compared to the material  
10    for the third layer 20 and therefore has more voids. The third layer 20 is relatively more dense than the first layer 16 and contains fewer voids. The density of each layer is selected to result in a desired ratio of dynamic stiffness to static stiffness in the mat 10. This ratio is selected to result in a desired dynamic compression or deflection of the mat 10 under load. The contour of the surface 12 also contributes to the dynamic compression characteristics of the mat 10 as will be  
15    further described below.

After the first layer 16 is cut from the large cylindrical member of rubber, it is placed in a profiling machine that physically cuts or otherwise applies the required depth and pattern of the profile into the rubber. One such profile is shown in the cross sectional view of Figure 2. It should be understood that the resultant surface 12 may take many forms including ones that are  
20    relatively flat and ones that have large variation in thickness between  $t_1$  and  $t$ . The example in Figures 1 and 2 shows the surface 12 in the form of an egg crate wherein peaks and valleys are sequentially alternated in a three dimensional array forming the bottom surface 12. The depth and pitch of the peaks and valleys can be varied to give a desired dynamic compression

characteristic. For example, sharp peaks and valleys offer greater dynamic compression or deflection under relatively small loads while wide short peaks and valleys result in less dynamic compression or deflection under relatively larger loads. The profiled surface geometry is therefore selected to result in a desired amount of compressive deflection under a given dynamic  
5 load. This dynamic compressive deflection serves to mitigate transfer of structure borne or impact noise from the rail 60 into the packed earth base 30 (Figure 2). For example, a freight rail car of 40 tons requires a stiffer mat. Here the profile would consist of relatively wide short peaks and valleys.

The three or more layers 16, 18, 20 are then assembled either through a lamination  
10 machine or through a machine that mechanically or chemically bonds the layers together. The third layer 20 advantageously prevents ballast stone penetration and the second layer 18 advantageously ensures uniform load distribution. The profiled bottom surface 12 advantageously provides generous drainage to the system.

The use of the mat 10 has various advantages over the prior art. The impact and sound  
15 absorption properties of the mat 10 prevent fouling of the ballast due to impact and vibration. Ballast fouling contributes to poor drainage and flooding of the railway bed. The contoured surface 12 provides not only good absorption and vibration absorption but also allows for effective drainage and preserves the ballast from fouling or degrading due to impact.

The foregoing illustrates some of the possibilities for practicing the invention. Many  
20 other embodiments are possible within the scope and spirit of the invention. It is, therefore, intended that the foregoing description be regarded as illustrative rather than limiting, and that the scope of the invention is given by the appended claims together with their full range of equivalents.

## I Claim:

1. A noise and vibration mitigating mat having a top bottom surfaces comprising:  
a first layer formed of recycled bound rubber products; the first layer having a  
contoured bottom surface and a flat top surface;  
5 a second layer adjacent the first layer, the second layer being formed of a fabric;  
and,  
a third layer being positioned adjacent the second layer and being formed of a  
recycled rubber product.

10 2. The noise and vibration mitigating mat of claim 1 wherein the contoured bottom  
surface has variations in thickness.

3. The noise and vibration mitigating mat of claim 2 wherein the mat is  
manufactured in a continuous sheet.

15

4. The noise and vibration mitigating mat of claim 3 wherein the first and third  
layers are cut from large cylindrical members each formed of Styrenebutadiene Rubber (SBR)  
and natural rubber mixed with a polyurethane to form a plurality of voids therein.

20 5. The noise and vibration mitigating mat of claim 4 wherein the first layer is further  
processed by a profiling machine which cuts the contour into the bottom surface.

6. The noise and vibration mitigating mat of claim 5 wherein the density of the third layer is greater than the density of the first layer.



1/3

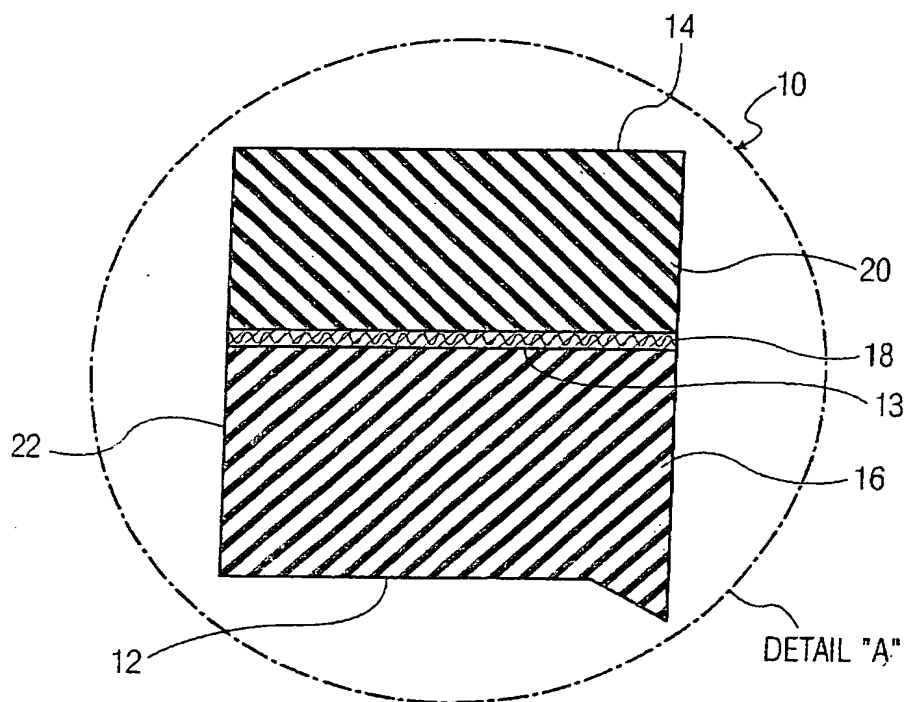


FIG. 1A

2/3

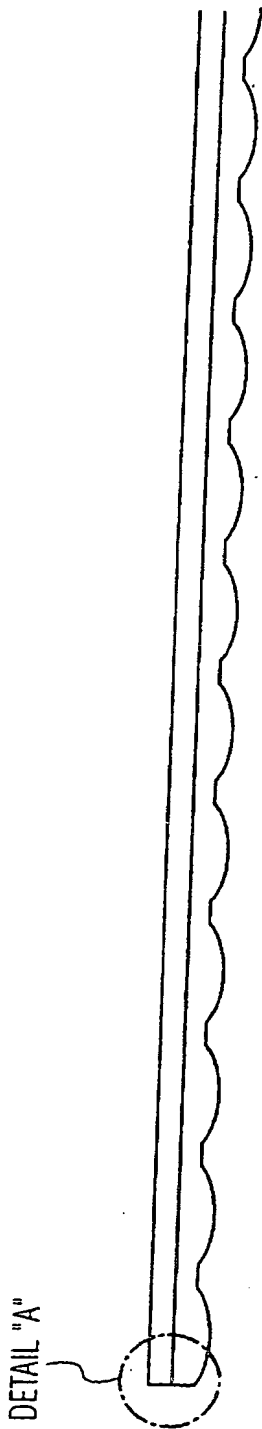


FIG. 1B

3/3

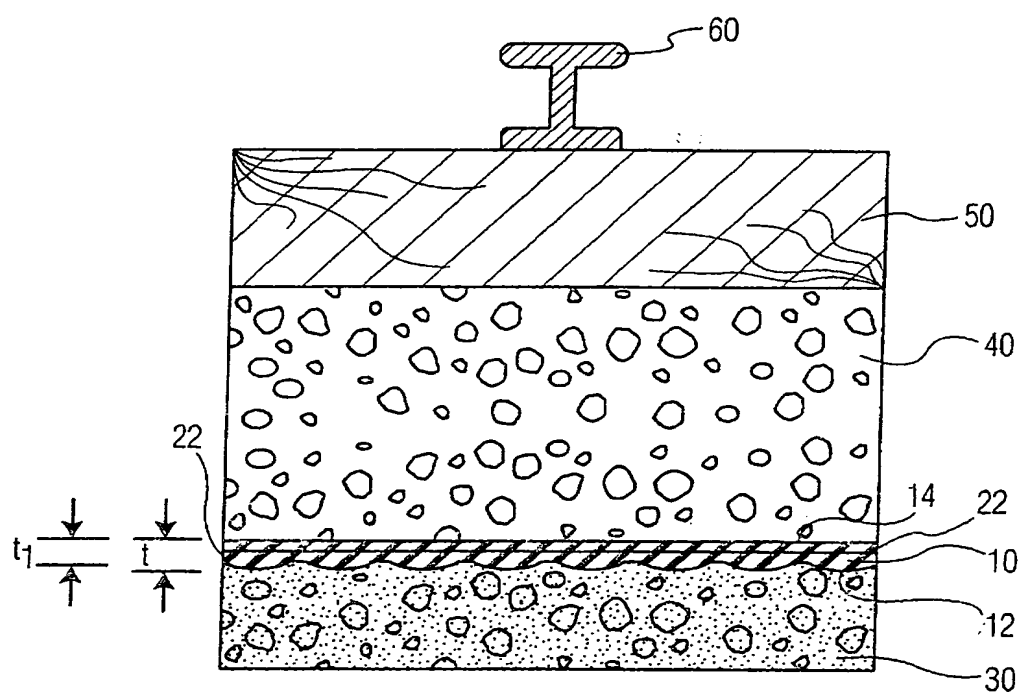


FIG. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/31348

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : E04B 1/82.2/02

US CL : 181/290,294

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 181/290,294,210,285,204

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

none

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,143,495 A (HINTZ) 13 March 1979 (13.03.1979), Figures 1 - 3, column 3, line 10 - column 4, line 14.	1 - 6
Y	US 3,948,009 A (BERNHARD) 06 April 1976 (06.04.1976), Figures 1-6, column 1, line 57 - column 3, line 3.	1 - 6
Y	US 5,438,171 A (SCHMANSKI) 01 August 1995 (01.08.1995), Figures 1-2, column 1, line 58 - column 2, line 55.	1 - 6

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;"

document member of the same patent family

Date of the actual completion of the international search

24 December 2003 (24.12.2003)

Date of mailing of the international search report

20 FEB 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Robert Nappi

Telephone No. (703)308-0956